
PROPOSED END ELEVATIONS & TRANSVERSE SECTION

Apex roof profile, log-clad gables and ridge-to-eaves heights


LEFT / WORKSHOP END



RIGHT / OFFICE END

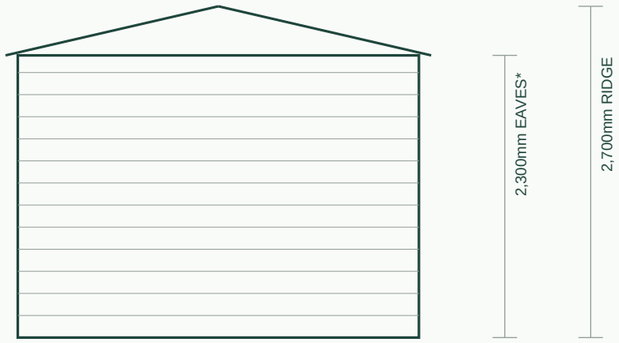

SCHEMATIC TRANSVERSE SECTION / EXISTING SLAB LEVEL +0.000

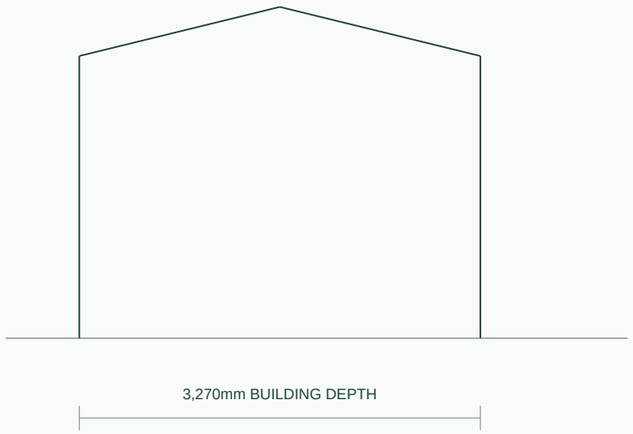

SECTION NOTES

Existing concrete slab retained and extended at same level.

70mm interlocking spruce log walls.

Black straight-edge shingles to roof.

Finished floor on the retained slab; no change to slab level.

No independent residential accommodation proposed.

*Eaves approximately 2,300mm (manufacturer specification).

SCALE 1:50 ON A3 AT 100%

0 2m 5m

Dimensions from manufacturer's published specification; internal details indicative.